


SP22G

1 watt - 7/8 inch diameter

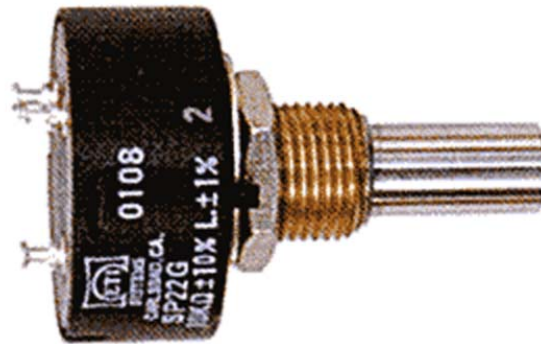

*Series SP22G potentiometers feature
Conductive Plastic elements and gold plated terminals*

Features

- Conductive Plastic resistive element
- High Temperature Plastic housing
- Stainless steel shaft
- Solderable Double Turret Terminals.
- Servo Mount version is SP22GS

Available Options

Center Tap, Sealed Body, Flatted Shaft,
Side Terminals, Side Load Treatment

Electrical Specifications

Resistance Range

500 to 100K ohms standard

Resistance Tolerance

±10%

Independent Linearity

±1%

Electrical Rotation

340° ±4°

Power Rating

1 watt

Insulation Resistance

1000 Megohms @ 500VDC

Dielectric Strength

500 VAC

Mechanical Specifications

Mechanical Rotation

Continuous

Torque

0.7oz. in.

Shaft End Play

.006Max.

Weight

1.1 oz.

Rotational Life

10,000,000 Turns rated

Environmental Specifications

Operating Temperature

-55°C to +105°C

Temperature Coefficient

±400 PPM/°C

Vibration

10HZ to 2000HZ 15G

Shock


50G 11MS

Moisture Resistance

40°C 95%RH 120 Hours

SP22G

1 watt - 7/8 inch diameter

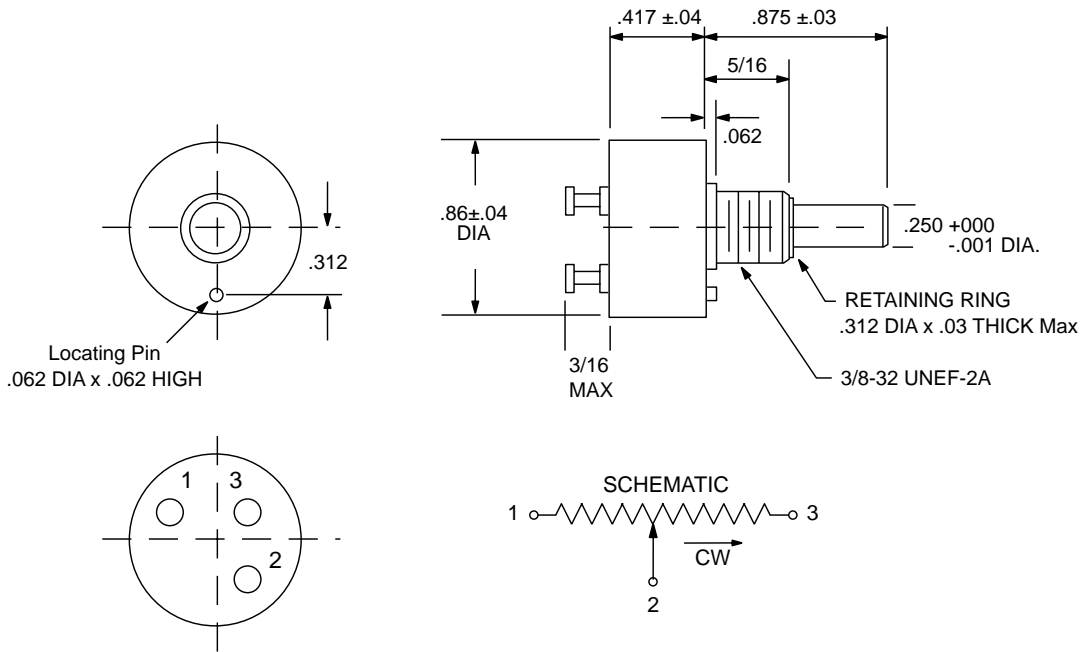

Ordering Information

Example Part Number: **SP22G-10K-CT**

SP22G	10K	CT
Model	Resistance	Options
SP22B	1K = 1K ohms 5K = 5K ohms 10K = 10K ohms 20K = 20K ohms 50K = 50K ohms 100K = 100K ohms	CT = Center Tap SB = Sealed Body FL = Flatted Shaft NS = No Stops SL = Side Load Treatment S = Servo Mount with ball bearings

On-line Quotations are available at <http://www.potentiometers.com>



36 Route 10 East Hanover, NJ 07936
 (800) 631-8083 Local: (973) 887-2550
 e-Mail: sales@state-elec.com
<http://www.state-elec.com> <http://www.potentiometers.com>